

REQUEST FOR QUOTES

Project Name: Ramsey County Edgerton at Centerville Drainage Project (Vadnais Heights)

Project#: Ramsey County Proj. #: RFB-PUBW28541-0-2024/KB/P-4009


❖ Bid Date/Time: April 11th, 2024 @ 2pm

❖ Bid Docs: https://meyerci.sharefile.com/public/share/web-scd15b7440de944e9826e27f353c6994e

Work Scopes Needed:

| Clearing & Grubbing | Guardrail | Dewatering | Street Sweeping |
|---------------------|--------------------|-----------------|---------------------------|
| Asphalt Paving | Concrete Flatwork | Traffic Control | Landscape/Erosion Control |
| Pavement Marking | Aggregate/Disposal | RCP/Precast | PVC/DIP |

Submit Quotes To: estimating@meyerci.com



The county has adopted the Principles for Inclusiveness in Contracting Program ("IICP") in order to increase the participation of small businesses ("SBEs") in the county's purchasing activities. The contracting inclusion goal for this Project is: 15%. For assistance with the SBE or for instructions or inquiries is your organization is a SBE please visit the Central Certification Program (Ramsey County, Mn) at:

Central (CERT) Certification Program | Saint Paul Minnesota (stpaul.gov)

Class of Work:


Construction of a drainage project in the City of Vadnais Heights Mn at the intersection of Edgerton Rd and Centerville St. which includes grading, full depth road construction, ditch construction, guardrail, erosion and sediment control, pedestrian and traffic management and signing. Th project will partially be on railroad property and directly adjacent to Vadnais Lake.

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact Project Manager/Estimator, Sam Petefish at (763) 391-5997 or Andy Smith at (763) 391-5945 or estimating@meyerci.com

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.



Project Location(s):

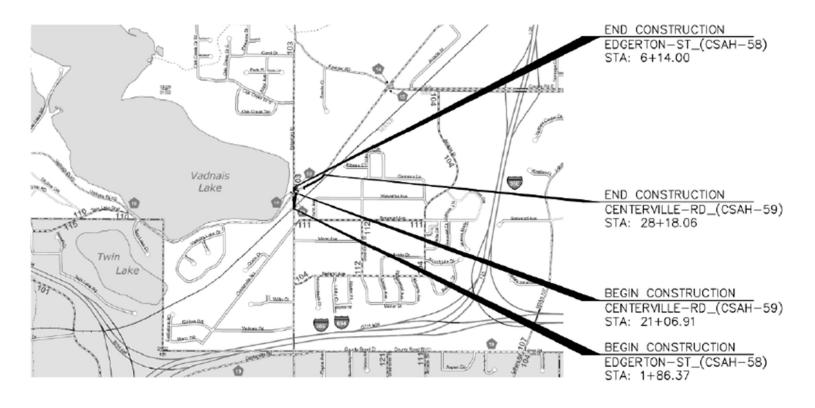

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact Project Manager/Estimator, Sam Petefish at (763) 391-5997 or Andy Smith at (763) 391-5945 or estimating@meyerci.com



REQUEST FOR QUOTES

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.

UNIT PRICING

| ITEM NO. | DESCRIPTION | UNITS | QTY |
|----------|--|----------|-------|
| 2021.501 | MOBILIZATION | LUMP SUM | 1 |
| 2101.502 | CLEARING | EACH | 49 |
| 2101.502 | GRUBBING | EACH | 49 |
| 2101.505 | CLEARING | ACRE | 0.15 |
| 2101.505 | GRUBBING | ACRE | 0.15 |
| 2104.502 | REMOVE PIPE APRON | EACH | 8 |
| 2104.502 | REMOVE ANCHORAGE ASSEMBLY-PLATE BEAM | EACH | 2 |
| 2104.502 | REMOVE HYDRANT | EACH | 1 |
| 2104.502 | REMOVE DRAINAGE STRUCTURE | EACH | 2 |
| 2104.502 | REMOVE CONCRETE FLUE | EACH | 1 |
| 2104.502 | REMOVE ECCENTRIC LOADER BCT | EACH | 2 |
| 2104.502 | SALVAGE SIGN | EACH | 8 |
| 2104.503 | SAWING BIT PAVEMENT (FULL DEPTH) | LINFT | 1348 |
| 2104.503 | REMOVE WATER MAIN | LIN FT | 72 |
| 2104.503 | REMOVE PIPE SEWERS | LINFT | 426 |
| 2104.503 | REMOVE BITUMINOUS CURB | LINFT | 691 |
| 2104.503 | REMOVE GUARDRAIL-PLATE BEAM | LIN FT | 230 |
| 2104.518 | REMOVE BITUMINOUS WALK | SQ FT | 405 |
| 2104.518 | REMOVE CONCRETE WALK | SQ FT | 198 |
| 2104.518 | REMOVE PAVEMENT | SQ FT | 24082 |
| 2106.507 | EXCAVATION - COMMON | SQ FT | 5742 |
| 2106.507 | EXCAVATION - SUBGRADE | SQ FT | 20 |
| 2106.507 | SELECT GRANULAR EMBANKMENT (CV) | CU YD | 20 |
| 2106.507 | COMMON EMBANKMENT (CV) | CU YD | 947 |
| 2106.601 | DEWATERING | LUMP SUM | 1 |
| 2112.519 | SUBGRADE PREPARATION | ROAD STA | 12 |
| 2123.610 | STREET SWEEPER (WITH PICKUP BROOM) | HOUR | 10 |
| 2211.507 | AGGREGATE BASE (CV) CLASS 5 | CUYD | 594 |
| 2360.590 | TYPE SP 9.5 WEARING COURSE MIX (4,E) | TON | 477 |
| 2360.509 | TYPE SP 12.5 WEARING COURSE MIX (2,C) | TON | 9 |
| 2360.509 | TYPE SP 12.5 NON WEAR COURSE MIX (4,8) | TON | 441 |
| 2451.607 | MEDIUM FILTER AGGREGATE (CV) | CU YD | 19.2 |
| 2501.502 | 15" RC PIPE APRON | EACH | 1 |
| 2501.502 | 24" RC PIPE APRON | EACH | 1 |
| 2501.502 | 30" RC PIPE APRON | EACH | 1 |
| 2501.502 | 72" RC PIPE APRON | EACH | 2 |
| 2501.502 | 58" SPAN RC PIPE-ARCH APRON | EACH | 2 |
| 2501.602 | TRASH GUARD FOR 72" PIPE APRON | EACH | 2 |



UNIT PRICING

| ITEM NO. | DESCRIPTION | UNITS | QTY |
|----------|---|----------|-------|
| 2501.602 | TRASH GUARD FOR 58" SPAN PIPE APRON | EACH | 2 |
| 2501.503 | 6" PERF PVC PIPE DRAIN | LINFT | 345 |
| 2503.503 | 8" DUCTILE IRON PEIPE SEWER CL 52 | LIN FT | 20 |
| 2503.503 | 28" SPAN RC PIPE-ARCH SEWER CL IIA | LINFT | 32 |
| 2503.503 | 36" SPAN RC PIPE-ARCH SEWER CL IIA | LINFT | 59 |
| 2503.503 | 58" SPAN RC PIPE-ARCH SEWER CL IIA | LIN FT | 170 |
| 2503.503 | 15" RC PIPE SEWER DES 3006 CL V | LINFT | 104 |
| 2503.503 | 18" RC PIPE SEWER DES 3006 | LINFT | 482 |
| 2503.503 | 18" RC PIPE SEWER DES 3008 CL IV | LIN FT | 20 |
| 2503.503 | 24" RC PIPE SEWER DES 3006 CL III | LIN FT | 34 |
| 2503.503 | 30" RC PIPE SEWER DES 3006 | LIN FT | 73 |
| 2503.503 | 72" RC PIPE SEWER DES 3008 CL II | LIN FT | 58 |
| 2504.602 | CONNECT TO EXISTING WATER MAIN | EACH | 6 |
| 2504.602 | HYDRANT | EACH | 1 |
| 2504.602 | ABANDON WATER SERVICE | EACH | 1 |
| 2504.602 | 6" GATE VALVE & BOX | EACH | 2 |
| 2504.603 | 6" WATERMAIN DUCTILE IRON CL 52 | LINFT | 8 |
| 2504.603 | 8" WATERMAIN DUCTILE IRON CL 52 | LIN FT | 20 |
| 2504.603 | 12" WATERMAIN DUCTILE IRON CL 52 | LINFT | 43 |
| 2504.603 | REPLACE BOLTS & BOX ON WATER MAIN VALVE | EACH | 2 |
| 2504.604 | 2" INSULATION | SQ YD | 45 |
| 2504.604 | POLYSTYRENE INSULATION | SQ YD | 21.3 |
| 2504.608 | DUCTILE IRON FITTINGS | LB | 1518 |
| 2506.502 | CONST DRAINAGE STRUCTURE DESIGN SPEC 1 | EACH | 1 |
| 2506.502 | CASTING ASSEMBLY | EACH | 20 |
| 2506.503 | CONST DRAINAGE STRUCTURE DESIGN SD-48 | LIN FT | 22.8 |
| 2506.503 | CONST DRAINAGE STRUCTURE DESIGN SD-60 | LIN FT | 3.1 |
| 2506.503 | CONST DRAINAGE STRUCTURE DESIGN SD-72 | LIN FT | 3.5 |
| 2506.503 | CONST DRAINAGE STRUCTURE DES 48-4020 | LIN FT | 35.7 |
| 2506.503 | CONST DRAINAGE STRUCTURE DES 72-4020 | LIN FT | 16.8 |
| 2506.503 | CONST DRAINAGE STRUCTURE DES 90-4020 | LIN FT | 8 |
| 2511.504 | GEOTEXTILE FILTER TYPE 4 | SQ YD | 434.6 |
| 2511.507 | RANDOM RIPRAP CLASS II | CUYD | 60.7 |
| 2511.507 | RANDOM RIPRAP CLASS III | CUYD | 98 |
| 2531.503 | CONCRETE CURB & GUTTER DESIGN B412 | LINFT | 420 |
| 2531.503 | CONCRETE CURB & GUTTER DESIGN B424 | LIN FT | 296 |
| 2540.602 | RELOCATE MAIL BOX SUPPORT | EACH | 1 |
| 2554.502 | GUIDE POST TYPE B | EACH | 8 |
| 2554.502 | ANCHORAGE ASSEMBLY - TYPE 31 | EACH | 2 |
| 2554.502 | END TREATMENT-TANGENT TERMINAL | EACH | 2 |
| 2554.503 | TRAFFIC BARRIER DESIGN TYPE 31 | LINFT | 100 |
| 2554.602 | T-BARRIER BRIDGE CONN DES 8318 | EACH | 2 |
| 2563.601 | TRAFFIC CONTROL | LUMP SUM | 1 |
| 2564.502 | INSTALL SIGN | EACH | 8 |



UNIT PRICING

| ITEM NO. | DESCRIPTION | UNITS | QTY |
|----------|---|----------|-------|
| 2573.501 | STABILIZED CONSTRUCTION EXIT | LUMP SUM | 1 |
| 2573.501 | EROSION CONTROL SUPERVISOR | LUMP SUM | 1 |
| 2573.502 | STORM DRAIN INLET PROTECTION | EACH | 16 |
| 2573.502 | CULVERT END CONTROLS | EACH | 7 |
| 2573.503 | SILT FENCE, TYPE MS | LIN FT | 382 |
| 2573.503 | FLOTATION SILT CURTAIN TYPE STILL WATER | LINFT | 60 |
| 2573.503 | SEDIMENT CONTROL LOG TYPE STRAW | LINFT | 480 |
| 2574.505 | SUBSOILING | ACRE | 0.1 |
| 2574.505 | SOIL BED PREPARATION | ACRE | 1 |
| 2574.507 | FILTER TOPSOIL BORROW | CU YD | 171 |
| 2574.508 | FERTILIZER TYPE 3 | POUND | 115.3 |
| 2574.508 | FERTILIZER TYPE 4 | POUND | 75.6 |
| 2575.504 | ROLLED EROSION PREVENTION CATEGORY 15 | SQ YD | 294 |
| 2575.504 | ROLLED EROSION PREVENTION CATEGORY 20 | SQ YD | 2274 |
| 2575.504 | ROLLED EROSION PREVENTION CATEGORY 25 | SQ YD | 2439 |
| 2575.505 | SEEDING | ACRE | 1 |
| 2575.505 | WEED SPRAYING | ACRE | 0.3 |
| 2575.506 | WEED SPRAY MIXTURE | GALLON | 0.1 |
| 2575.508 | SEED MIXTURE 25-131 | POUND | 13.4 |
| 2575.508 | SEED MIXTURE 25-141 | POUND | 27.7 |
| 2575.508 | SEED MIXTURE 33-261 | POUND | 12.4 |
| 2575.508 | SEED MIXTURE 34-271 | POUND | 1.8 |
| 2575.523 | HYDRAULIC BONDED FIBER MATRIX | POUND | 3821 |
| 2575.523 | WATER | M GALLON | 58.5 |
| 2575.523 | RAPID STABILIZATION METHOD 3 | M GALLON | 6.2 |
| 2582.503 | 4" SOLID LINE PAINT | LIN FT | 1020 |