



REQUEST FOR QUOTES

Project Name: CASH 78 / CSAH 69 Roundabout

Owner: Scott County

County Project No.: CP 69-08 / State Project No.: 070-678-004 & Minn. Proj. No. HSIP 7024 (054)

Bid Date & Time: April 23, 2024 @ 10:00 AM

Link to Bid Documents: <https://meyerci.sharefile.com/public/share/web-s7d79372944be408f929e993016d6f455>

This project has a minimum goal of 18.1% Disadvantage Business Enterprises (DBE) subcontracting goals established. A directory of all DBEs in the state of Minnesota is available at the following link

<http://mnucp.metc.state.mn.us/default.aspx>

• DI/PVC Pipe	• RCP & Structures	• Clearing & Grubbing
• Mailbox Support	• Sawing	• Electrical
• Disposal	• Trucking	• Geotextile
• Aggregates	• Milling	• Asphalt Paving/seal coat
• Steel Casing Pipe	• Traffic Control/Signage	• Erosion Control/Seeding
• Topsoil	• Pavement Markings	• Temp. Pavement Marking
• As Built	• Portable Restrooms	• Roll-off Dumpster
• Concrete Curb & Gutter	• Concrete Flatwork	•

Submit Quotes to: estimating@meyerci.com or Fax to (763) 391-5960


Project Description:

A single-lane roundabout will be constructed at the intersection of CSAH 69 and CSAH 78.

This project consists of Aggregate Shouldering, Grading, Bituminous Pavement Removal, Milling Bituminous Pavement, Concrete Pavement, Plant-Mixed Asphalt Pavement, Permanent Pavement Markings, Lighting, Storm Sewer, Roundabout.

Estimated Dates: Contractor must start construction operations/hold a Pre-Con meeting and start grubbing operations on June 1, 2024. Final – 10/01/24

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact the project estimator, Scott Pelletier (763) 391-5990 or spelletier@meyerci.com

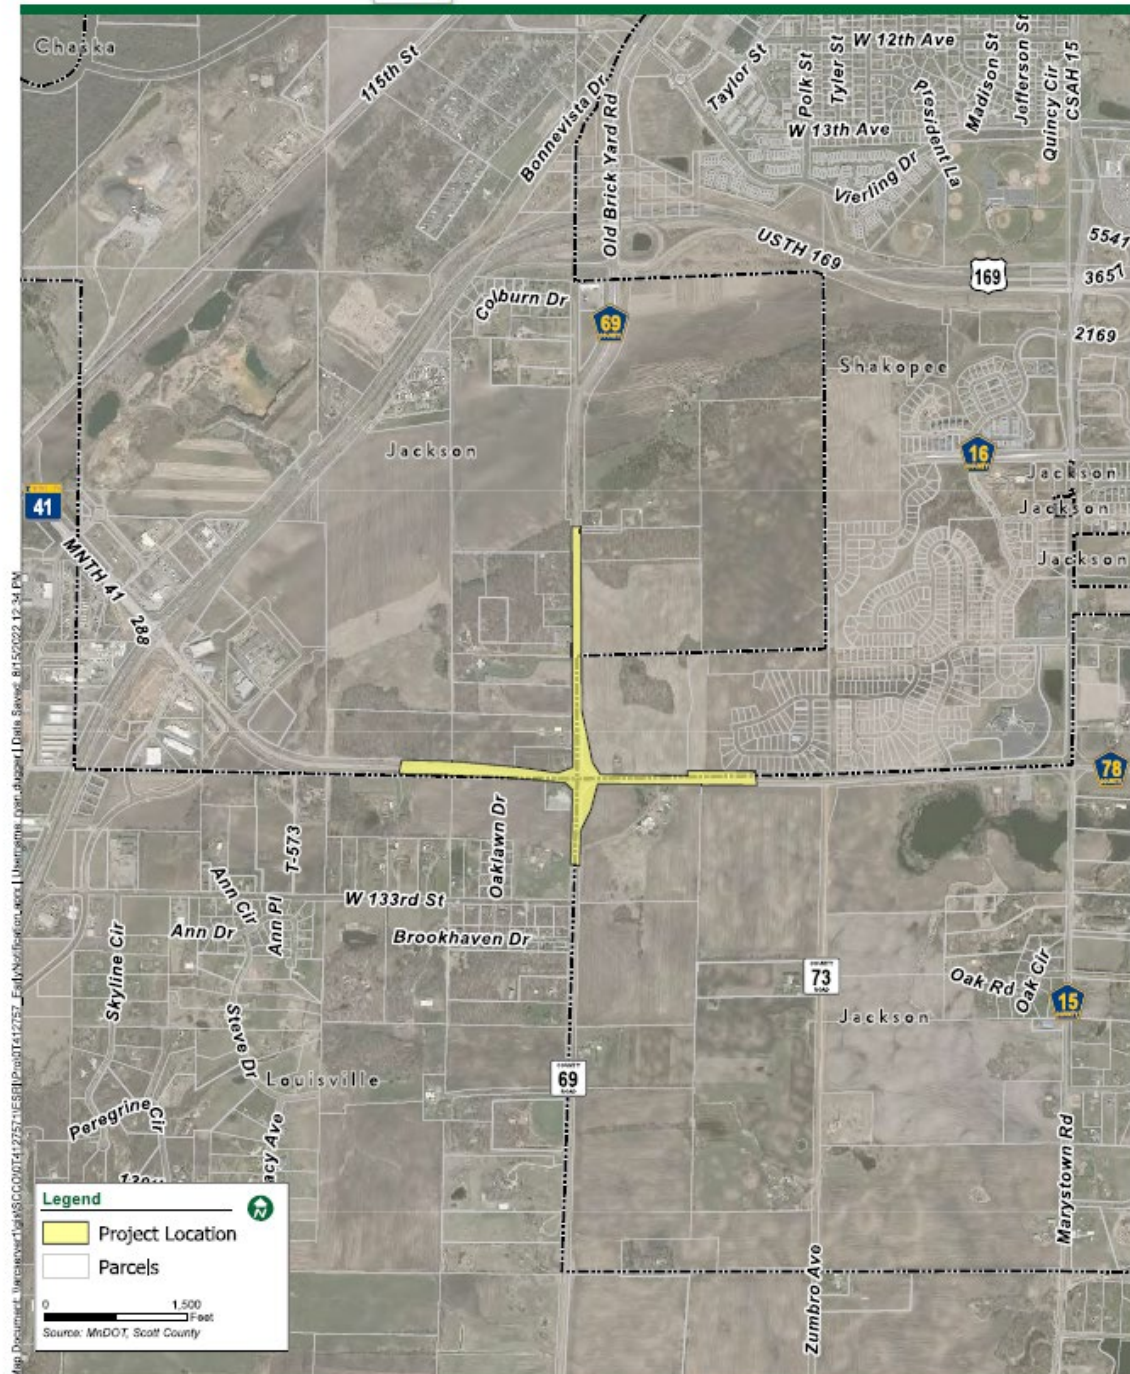

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.

11000 93rd Ave N • Maple Grove, MN 55369

Phone: 763.391.5959 • Fax: 763.391.5960

www.meyerci.com

Line Number	Item number	Description	Units	Quantity
1	2021.501	MOBILIZATION	LUMP SUM	1
2	2101.502	CLEARING	EACH	2
3	2101.502	GRUBBING	EACH	2
4	2104.502	REMOVE PIPE APRON	EACH	5
5	2104.502	REMOVE CONCRETE NOSE	EACH	1
6	2104.502	REMOVE SIGN	EACH	19
7	2104.502	SALVAGE SIGN	EACH	2
8	2104.502	SALVAGE MAIL BOX SUPPORT	EACH	2
9	2104.503	SAWING BITUMINOUS PAVEMENT (FULL DEPTH)	LIN FT	650
10	2104.503	REMOVE PIPE CULVERTS	LIN FT	297
11	2104.504	REMOVE BITUMINOUS DRIVEWAY PAVEMENT	SQ YD	686
12	2104.504	REMOVE BITUMINOUS PAVEMENT	SQ YD	11539
13	2104.602	RELOCATE STREET LIGHT	EACH	1
14	2105.504	GEOTEXTILE FABRIC TYPE 5	SQ YD	17812
15	2106.507	EXCAVATION - COMMON	CU YD	35446
16	2106.507	EXCAVATION - CHANNEL AND POND	CU YD	2879
17	2106.507	SELECT GRANULAR EMBANKMENT (CV)	CU YD	11911
18	2106.507	COMMON EMBANKMENT (CV)	CU YD	5663
19	2108.504	GEOTEXTILE FABRIC TYPE 1	SQ YD	262
20	2118.507	AGGREGATE SURFACING (CV) CLASS 2	CU YD	150
21	2211.507	AGGREGATE BASE (CV) CLASS 5	CU YD	6963
22	2232.504	MILL BITUMINOUS SURFACE (2.0")	SQ YD	2756
23	2301.602	DRILL AND GROUT DOWEL BAR (EPOXY COATED)	EACH	100
24	2355.506	BITUMINOUS MATERIAL FOR FOG SEAL	GALLON	2779
25	2356.504	BITUMINOUS SEAL COAT	SQ YD	16301
26	2356.506	BITUMINOUS MATERIAL FOR SEAL COAT	GALLON	5868
27	2360.509	TYPE SP 9.5 WEARING COURSE MIXTURE (2,B)	TON	171
28	2360.509	TYPE SP 12.5 NON WEARING COURSE MIXTURE (3,B)	TON	2283
29	2360.509	TYPE SP 12.5 WEARING COURSE MIXTURE (3,F)	TON	3680
30	2451.507	FINE AGGREGATE BEDDING (CV)	CU YD	41
31	2451.607	MEDIUM FILTER AGGREGATE (CV)	CU YD	41
32	2501.502	15" RC PIPE APRON	EACH	3
33	2501.502	24" RC PIPE APRON	EACH	6
34	2501.503	15" RC PIPE CULVERT CLASS V	LIN FT	14
35	2502.502	4" PRECAST CONCRETE HEADWALL	EACH	9
36	2502.503	8" TP PIPE DRAIN	LIN FT	99
37	2502.503	8" PERF TP PIPE DRAIN	LIN FT	182
38	2502.503	4" PERF PE PIPE DRAIN	LIN FT	5346
39	2502.602	8" TP PIPE DRAIN CLEAN OUT	EACH	4
40	2503.503	15" RC PIPE SEWER CLASS V	LIN FT	1118
41	2503.503	18" RC PIPE SEWER CLASS III	LIN FT	142
42	2503.503	21" RC PIPE SEWER CLASS III	LIN FT	224
43	2503.503	24" RC PIPE SEWER CLASS III	LIN FT	506
44	2503.602	CONNECT TO EXISTING STORM SEWER	EACH	1
46	2504.603	20" STEEL CASING PIPE	LIN FT	120
47	2506.502	CONSTRUCT DRAINAGE STRUCTURE DESIGN SPECIAL 1	EACH	1
49	2506.502	CONSTRUCT DRAINAGE STRUCTURE DESIGN G	EACH	11
50	2506.502	CONSTRUCT DRAINAGE STRUCTURE DESIGN SD-60	EACH	1

51	2506.502 CONSTRUCT DRAINAGE STRUCTURE DESIGN 48-4020	EACH	20
52	2506.502 CONSTRUCT DRAINAGE STRUCTURE DESIGN 60-4020	EACH	2
53	2511.504 GEOTEXTILE FILTER TYPE 4	SQ YD	110
54	2511.509 RANDOM RIPRAP CLASS III	TON	78
55	2521.518 6" CONCRETE WALK	SQ FT	3276
56	2521.518 7" CONCRETE WALK	SQ FT	3468
57	2521.602 DRILL AND GROUT REINF BAR (EPOXY COATED)	EACH	150
58	2531.503 CONCRETE CURB AND GUTTER DESIGN B424	LIN FT	3585
59	2531.503 CONCRETE CURB AND GUTTER DESIGN D424	LIN FT	2205
60	2531.503 CONCRETE CURB AND GUTTER DESIGN R424	LIN FT	333
61	2531.504 CONCRETE MEDIAN	SQ YD	1245
62	2531.618 TRUNCATED DOMES	SQ FT	304
63	2540.602 INSTALL MAIL BOX SUPPORT	EACH	2
64	2545.502 LIGHT FOUNDATION DESIGN E MODIFIED	EACH	16
65	2545.502 HANDHOLE	EACH	1
66	2545.503 1.25" NON-METALLIC CONDUIT	LIN FT	2000
68	2554.602 GUIDE POST TYPE SPECIAL	EACH	10
69	2563.601 TRAFFIC CONTROL	LUMP SUM	1
70	2563.613 PORTABLE CHANGEABLE MESSAGE SIGN	UNIT DAY	300
71	2563.618 CONSTRUCTION SIGN-SPECIAL	SQ FT	100
72	2564.502 RIGHT OF WAY MARKER TYPE X3-1	EACH	10
73	2564.602 INSTALL SIGN	EACH	2
74	2564.602 DELINEATOR / MARKER	EACH	8
75	2564.602 DELINEATOR / MARKER PANEL	EACH	3
76	2564.618 SIGN	SQ FT	366
77	2573.601 TEMPORARY EROSION CONTROL	LUMP SUM	1
78	2574.505 SUBSOILING	ACRE	2.8
79	2574.505 SOIL BED PREPARATION	ACRE	2.8
80	2574.507 FILTER TOPSOIL BORROW (CV)	CU YD	20
81	2574.507 COMPOST GRADE 2	CU YD	1109
82	2574.508 FERTILIZER TYPE 3	POUND	775
83	2574.508 FERTILIZER TYPE 4	POUND	37
84	2575.505 SEEDING	ACRE	4.1
85	2575.505 MOWING	ACRE	7.8
86	2575.505 WEED SPRAYING	ACRE	1.9
87	2575.506 WEED SPRAY MIXTURE	GALLON	2.1
88	2575.508 SEED MIXTURE 25-131	POUND	220
89	2575.508 SEED MIXTURE 33-261	POUND	9
90	2575.508 SEED MIXTURE 35-221	POUND	106
91	2575.508 HYDRAULIC REINFORCED FIBER MATRIX	POUND	4857
92	2575.604 ROLLED EROSION PREVENTION CATEGORY 25	SQ YD	13929
93	2580.503 INTERIM PAVEMENT MARKING	LIN FT	13410
94	2582.503 6" SOLID LINE MULTI-COMPONENT GROUND IN (WR)	LIN FT	10980
95	2582.503 24" SOLID LINE MULTI-COMPONENT GROUND IN (WR)	LIN FT	210
96	2582.503 4" DOUBLE SOLID LINE MULTI-COMPONENT GROUND IN (WR)	LIN FT	2430
97	2582.503 12" DOTTED LINE PREFORM THERMOPLASTIC GROUND IN (WR)	LIN FT	84
98	2582.518 PAVEMENT MESSAGE PAINT	SQ FT	121
99	2582.518 CROSSWALK PREFORM THERMOPLASTIC GROUND IN	SQ FT	600
100	2011.601 AS BUILT	LUMP SUM	1

2503.602 SETUP BORING PIT	EACH	0
2545.503 3" NON-METALLIC CONDUIT	LIN FT	0